



## DSAW Pipe Manufacturer Specification Guide

**Outside Diameter:** 24" to 48"


**Wall Thickness:** up to 1.125"

**Grades:**

- API 5L Gr.B to X80
- ASTM A252-3

**Pipe Lengths:**

- DRL (40 ft)
- Double Jointing capability

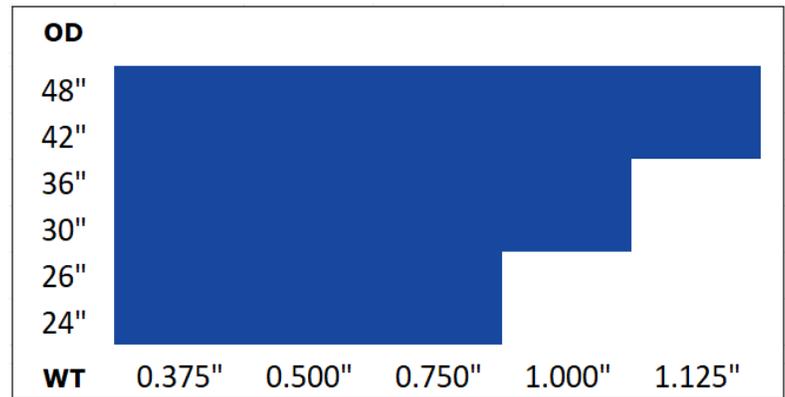

**Coating:**

- OD Fusion Bonded Epoxy
- OD Abrasion Resistant Overlay
- ID Flow Efficiency Epoxy

**Additional Information:**

- UOE forming process
- API and ISO 9001:2015 Certified
- Plate mill located adjacent to the pipe mill
- Convenient truck, barge and rail access

\*We are continuously adding to our portfolio, specifically melted and manufactured in the US materials, please contact us for further inquiries on additional capabilities.